

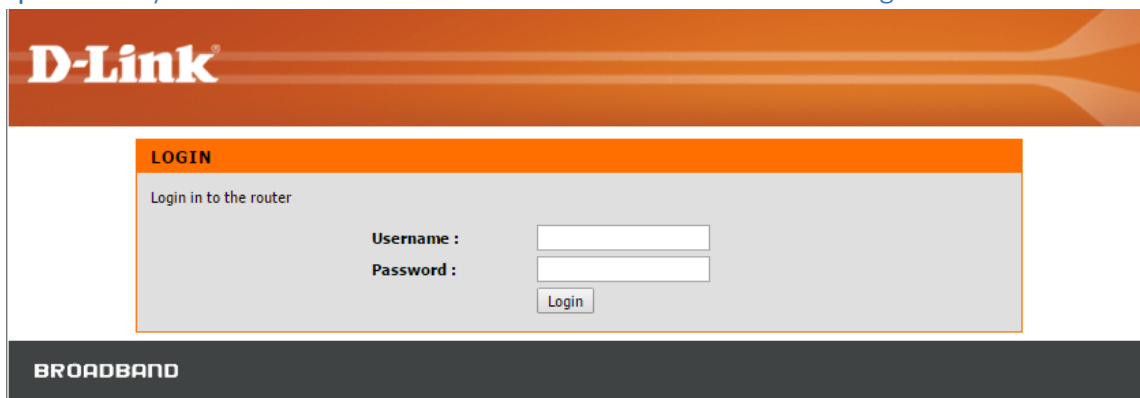
## How to configure ADSL or TM Streamyx

**Step 1:** Connect Your PC (Laptop) to the Router (Port 1,2,3,4 either one of them) using Network cable.

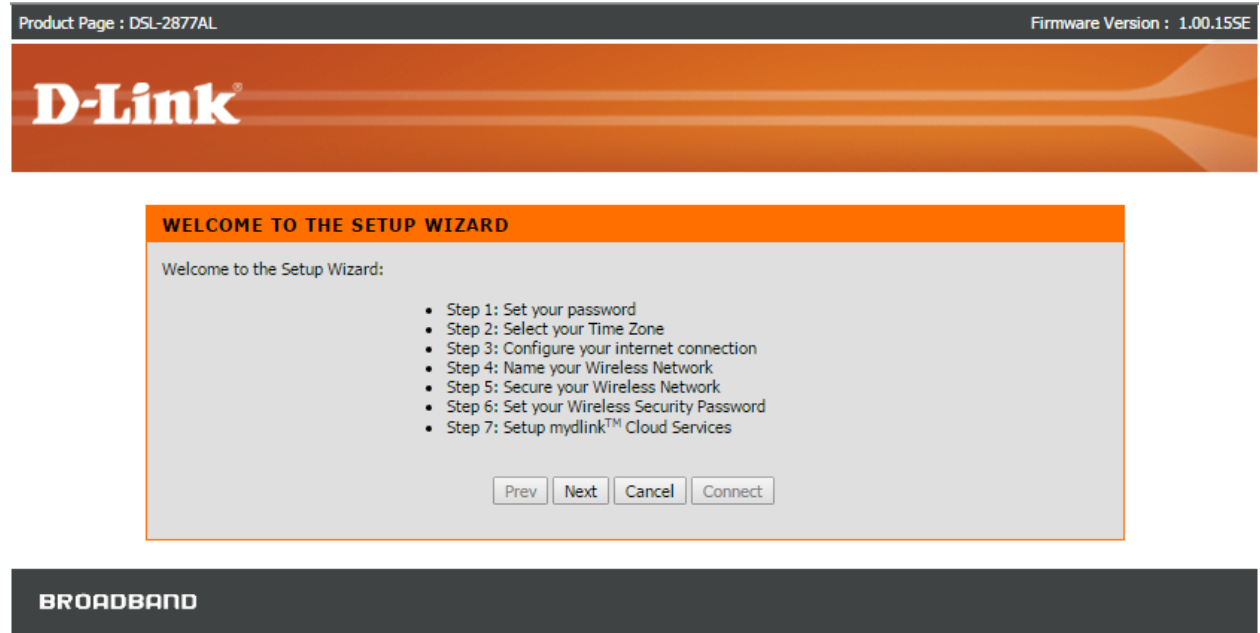
**Step 2:** Launch your browser (Google Chrome) and key in 192.168.1.1 in the address column and press Enter



**Step 3:** Enter your Username: admin and Password: admin. Click on Log In

A screenshot of the D-Link login page. At the top, there is a dark orange header with the "D-Link" logo in white. Below the header, there is a white box with an orange border. Inside this box, the word "LOGIN" is written in orange. Below "LOGIN", the text "Login in to the router" is displayed. There are two input fields: "Username :" and "Password :". Below the "Password :" field is a "Login" button. At the bottom of the page, there is a dark grey footer with the word "BROADBAND" in white.

**Step 4:** You will see a D-Link setup wizard page, click on Next.

A screenshot of the D-Link setup wizard page. At the top, there is a dark orange header with the "D-Link" logo in white. Below the header, there is a white box with an orange border. Inside this box, the text "WELCOME TO THE SETUP WIZARD" is written in orange. Below this, the text "Welcome to the Setup Wizard:" is displayed. There is a list of seven steps: "Step 1: Set your password", "Step 2: Select your Time Zone", "Step 3: Configure your internet connection", "Step 4: Name your Wireless Network", "Step 5: Secure your Wireless Network", "Step 6: Set your Wireless Security Password", and "Step 7: Setup mydlink™ Cloud Services". At the bottom of the box, there are four buttons: "Prev", "Next", "Cancel", and "Connect". At the bottom of the page, there is a dark grey footer with the word "BROADBAND" in white.

Step 5: Choose your device Password, click on Next.

Product Page : DSL-2877AL Firmware Version : 1.00.15SE

**D-Link<sup>®</sup>**

**STEP 1: SET YOUR PASSWORD**

To secure your new networking device, please set and verify a password below:

Password :

Verify Password :

**BROADBAND**

Step 6: Choose your device Time Zone to GMT+8, click on Next.

Product Page : DSL-2877AL Firmware Version : 1.00.15SE

**D-Link<sup>®</sup>**

**STEP 2: SELECT YOUR TIME ZONE**

Select the appropriate time zone for your location. This information is required to configure the time-based options for the router.

Time Zone:

**BROADBAND**

**Step 7:** Choose the following, and click **Next**.

Internet Connection Type : **ADSL**  
Country : **Malaysia**  
Internet Service Provider : **Choose your ISP (Streamyx PPPoE or etc)**  
Protocol : **PPPoE (Or PPPoA dependent on your selection)**  
Connection Type : **LLC**  
VPI : **0**  
VCI : **35**  
MTU : **1492**



**STEP 3: CONFIGURE YOUR INTERNET CONNECTION**

Please select your Interface and Protocol from the list below.

Internet Connection Type : ADSL  
Country : Malaysia  
Internet Service Provider : (Click to Select)

Prev Next C

- (Click to Select)
- Maxis (Maxis PPPoA)
- Maxis (Maxis PPPoE)
- Streamyx (Telecom Malaysia - PPPoE)
- Streamyx (Telecom Malaysia - PPPoA)
- Time
- Others

**BROADBAND**

**Step 8:** Choose the following, and click **Next**.

Username : **Username provided by your ISP**  
Password : **Password provided by your ISP**  
Confirm Password : **Password provided by your ISP**

**SET PPPOE**

Enter the PPPoE information provided to you by your ISP. Click Next to continue.

User Name : user@streamyx  
Password : \*\*\*\*  
Confirm Password : \*\*\*\*

Prev Next Cancel Connect

Step 9: Fill in the following, and click [Next](#).

2.4G Wireless SSID : **2.4G Wireless Name**  
5G Wireless SSID : **5G Wireless Name**

**STEP 4: NAME YOUR WIRELESS NETWORK**

Your wireless network needs a name so it can be easily recognised by wireless clients. For security purpose, it is highly recommended to change the default pre-configured network name.

**2.4G Wireless Network Name (SSID) :**

**5G Wireless Network Name (SSID) :**

Step 10: Choose the following, and click [Next](#).

BEST : **WPA2 (Preferred Security)**  
Better : **WPA**  
Good : **WPE**  
None : **No security**

**STEP 5: SECURE YOUR WIRELESS NETWORK**

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

There are three levels of wireless security - Good Security, Better Security, or Best Security. The level you choose depends on the security features your wireless adapters support.

For information on which security features your wireless adapters support, please refer to the adapters' documentation.  
Note: All wireless adapters currently support WPA

**BEST :**  Select this option if your wireless adapters SUPPORT WPA2

**BETTER :**  Select this option if your wireless adapters SUPPORT WPA

**GOOD :**  Select this option if your wireless adapters DO NOT SUPPORT WPA

**NONE :**  Select this option if your do not want to activate any security features

Step 11: Fill in the following, and click [Next](#).to continue mydlink setup or Click [Connect](#) to skip mydlink setup.

2.4G Wireless Security Password : **2.4G Wireless Security Password**  
5G Wireless Security Password : **5G Wireless Security Password**

**STEP 6: SET YOUR WIRELESS SECURITY PASSWORD**

Once you have selected your security level - you will need to set a wireless security password. With this password, a unique security key will be generated.

**2.4G Wireless Security Password :**

**5G Wireless Security Password :**

--- END ---